





# FUSION CONNECTORS™

product # 22040

## Tools needed :

- 9/16" wrench and key
- 1/4" Allen Key

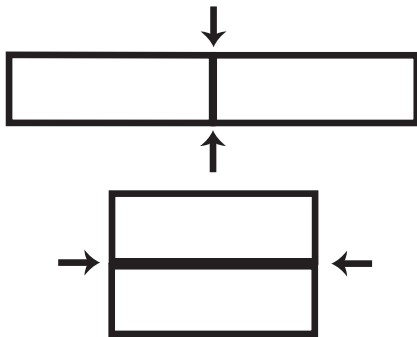

For installation on Multinautic® Aluminum QPF-500™ & QPF-475™ floating docks.

The flex-free fusion connector prevents the floating dock from bending at junctions under wave action or people walking, creating a solid deck to enjoy!

These junction stabilisers must be installed between two floating dock sections equipped with connector hinges #22041. Not to be used between a floating section and a semi-floating section because movement is the function of the semi-floating section.

Once the nuts installed underneath will have reach the bottom plates, do not tight them more than one quarter of a turn. If you tight too much, they will be hard to loosen for storage in autumn or if you wish to modify your dock configuration in summer.

After the installation, be sure to tighten securely the socket set screws, already inserted into leg holders, and check them periodically.

It's highly recommended to wear shoes or sandals on a floating dock. Beware your fingers and toes!



If you encounter any problem with this product, do not return it to the store  
Please call our Customer Service : 1-800-585-1237